





## Plotseed XXL

Plotseeder for no-tillage application, tractor mounted.


The Plotseed XXL was specially designed for minimum and no-till seeding of trial plots. A variety of distribution systems makes it possible to distribute the seed for a plot over multiple rows.

The particularly robust frame allows for the use of heavy no-till openers in combination with coulters and fertilizer openers, as well as combinations of multiple distribution systems. The modular system with its various options allows you to customize the planter for almost any application.

## Your benefits summed up:

- Minimum and no-till seeding of plots even under difficult soil conditions through use of various opener systems as well as add-on weights
- Easy and safe operation thanks to a clear-cut layout
- Easy track width and row spacing adjustment
- Wide range of application, thanks to different feeding variants



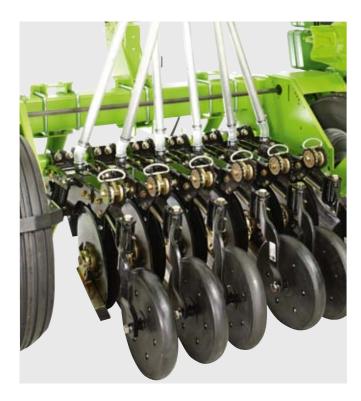



## **Technical Data**

Basic machine	ne	
Attachment options	3-point hydraulic system on tractor	
Row numbers	2 - 12 rows	
Row spacing	From 12.5 cm depending on opener type	
Track width	1250 - 1900 mm, adjustable	
Tires	7.60-15 Impl-R 8PR	

Feeding of the seed distribution system	e seed distribution system	
Belted cone	290 or 195 mm diameter	
Cell wheel	264 or 401 mm diameter	
Several seed distribution systems	These combinations of seed distribution systems are available:  - 2 belted cones side by side  - 2 belted cones in a row  - 2 cell wheels in a row  - 2 cell wheels side by side  - cell wheel and belted cone in a row – for simultaneous sowing and spreading of fertilizer or micro granulate	
Continuous drilling device	13   Contents	

Slope compensation	nsation	
Fixed frame	No slope compensation	
Slope compensation via 2 push buttons	Manual slope compensation	
Slope compensation by sensors	Automatic slope compensation	

Opener systems	
Double disk opener	ACRA PLANT, GREAT PLAINS, LEMKEN and others upon request

Dimensions	
Measurements	Length: 2000 mm Width: 2550 mm Height: approx. 2000 mm
Weight	Approx. 1500 - 2000 kg, depending on features

## Options

Measuring wheel, spring tine harrow, wind and rain protection cabin, cable trip system, special equipment for grass and fine seeds, micro-granulate spreader, row marker, fertilizer spreader with fertilizer opener

We reserve the right to make technical alterations.